



PORSCHE



All you need now is the right tyre

**Recommendations for your
Porsche Classic Vehicle summer tyre**

911/912/911 Turbo (930)

2/2008

Recommended makes and types of summer tyres

911/912 up to 1968

Wheel size	Size	RO	Axles	Tyre size	Tread designation	Spec.	Characteristics		Vehicles
							Dry handling	Wet handling	
15-inch	6Jx15	36	FA/RA	185/70 R15 89V	Michelin XWX ¹⁾	N0	++	++	911, all models up to 1968
					Fulda Y - 2000	N0	+	++	
	6Jx15	36	FA/RA	195/65 R15 91V	Pirelli P6000 ²⁾	N1	++	+	911, '65 - '67 models
					Goodyear Excellence	N0	+	++	911 S, '67 & '68 models
					Fulda Carat Progresso	N0	+	++	911 L and T, '68 model
					Dunlop SP Sport FastResponse	N0	++	++	912, '66 - '68 models

911 as of 1969

Wheel size	Size	RO	Axles	Tyre size	Tread designation	Spec.	Characteristics		Vehicles
							Dry handling	Wet handling	
15-inch	6Jx15	36	FA	195/65 R15 94W	Pirelli P 6000 ²⁾	N1	++	+	911, as of '69 model
	7Jx15	23,3	RA	215/60 R15 94W	Pirelli P 6000 ²⁾	N1	++	+	
16-inch	6Jx16	36	FA	205/55 ZR16	Pirelli P-Zero Direzionale	N3	++	++	911, as of '69 model
					Bridgestone Potenza S-02	N3	0	++	
					Continental ContiSportContact	N1	+	+++	
					Michelin SX MXX3	N2	++	++	
					Michelin Pilot Exalto PE2	N0	+	+++	
					Pirelli P-Zero Direzionale	N3	++	++	
	7Jx16	23,3	RA	205/55 ZR16	Bridgestone Potenza S-02	N3	0	++	
					Continental ContiSportContact	N1	+	+++	
					Michelin SX MXX3	N2	++	++	
					Michelin Pilot Exalto PE2	N0	+	+++	
					Pirelli P-Zero Direzionale	N3	++	++	
					Bridgestone Potenza S-02	N3	++	+	
	7Jx16	23,3	RA	225/50 ZR16	Continental ContiSportContact	N1	+	+++	
					Michelin SX MXX3	N2	+	+	
					Michelin Pilot Exalto PE2	N0	+	+++	
					Pirelli P-Zero Asimmetrico	N3	++	++	
					Bridgestone Potenza S-02	N3	++	+	
					Continental ContiSportContact	N1	+	+++	

911 Turbo (930) up to 1989

Wheel size	Size	RO	Axles	Tyre size	Tread designation	Spec.	Characteristics		Vehicles
							Dry handling	Wet handling	
16-inch	7Jx16	23,3	FA	205/55 ZR16	Pirelli P-Zero Direzionale	N3	++	++	911 Turbo ('75 - '89 models)
					Bridgestone Potenza S-02	N3	+	++	
					Continental ContiSportContact	N1	++	+++	
	8Jx16	10,6	RA	225/50 ZR16	Michelin SX MXX3	N2	+	+	911 Carrera "Turbo Look" ('85 - '86 models)
					Pirelli P-Zero Asimmetrico	N3	++	++	
					Bridgestone Potenza S-02	N3	+	++	
	7Jx16	23,3	FA	205/55 ZR16	Continental ContiSportContact	N1	++	+++	911 Turbo ('75 - '89 models)
					Michelin SX MXX3	N2	+	+	
					Michelin Pilot Exalto PE2	N0	+	+++	
	9Jx16	15	RA	245/45 ZR16	Continental ContiSportContact	N1	++	++	911 Carrera "Turbo Look" ('85 - '86 models)
					Michelin SX MXX3	N2	++	++	
					Continental ContiSportContact	N1	+++	+++	

0 = satisfactory; + = good; ++ = very good; +++ = excellent

¹⁾ Only one version of this tyre is produced. It therefore has no (!) specification code. However, it still meets all Porsche requirements and is therefore approved accordingly. This is the only tyre that may also be mounted with a tube. Mounting tyres with tubes is not permitted for all other tyres.

²⁾ Load index/speed index 91W

Only tyres of the same make and type, with the same speed index and the same specification code (N0, N1, N2 ...) may be used on a vehicle.

Speed Index: V= 240 km/h (150 mph)
W= 270 km/h (169 mph)

Further detailed information about permitted wheel and tyre sizes as well as spacers that may be required can be found in the relevant parts certificates/manufacturer's certificates held by the Porsche partners.

Recommended makes and types of summer tyres

911 (964)

Wheel size	Size	RO	Axles	Tyre size	Tread designation	Spec.	Characteristics		Vehicles
							Dry handling	Wet handling	
16-inch	6Jx16	52/52,3	FA	205/55 ZR16	Pirelli P-Zero Direzionale	N3	++	++	964 Carrera 2, '90 - '94 models
					Michelin Pilot Exalto PE2	N0	0	+++	964 Carrera 4, '89 - '94 models
					Bridgestone Potenza S-02	N3	++	++	964 Carrera RS, '92 model
					Continental ContiSportContact	N1	+++	+++	964 Speedster, '93 & '94 models
					Michelin SX MXX3	N2	+	++	
	8Jx16	52/52,3	RA	225/50 ZR16	Pirelli P-Zero Asimmetrico	N3	++	++	
					Michelin Pilot Exalto PE2	N0	0	+++	
					Bridgestone Potenza S-02	N3	++	++	
					Continental ContiSportContact	N1	+++	+++	
					Michelin SX MXX3	N2	+	++	
	7Jx16	55	FA	205/55 ZR16	Michelin SX MXX3	N2	+	++	964 Carrera 2, '90 - '94 models
					Bridgestone Potenza S-02	N3	++	+	964 Carrera 4, '89 - '94 models
					Continental ContiSportContact	N1	+++	+++	964 Carrera RS, '92 model
					Michelin SX MXX3	N2	+	++	964 Speedster, '93 & '94 models
					Bridgestone Potenza S-02	N3	++	+	
	9Jx16 *)	52,3	RA	245/45 ZR16	Continental ContiSportContact	N1	+++	+++	
					Michelin SX MXX3	N2	+	++	
					Bridgestone Potenza S-02	N3	++	+	
					Continental ContiSportContact	N1	+++	+++	
17-inch	7Jx17	55	FA	205/50 ZR17	Pirelli P-Zero Rosso	N3	++	+	964 Carrera 2, '90 - '94 models
					Bridgestone Potenza S-02A	N4	++	++	964 Carrera 4, '89 - '94 models
					Continental ContiSportContact2	N2	+++	+++	964 Carrera RS, '92 model
					Michelin Pilot Sport PS2	N3	+++	++	964 Speedster, '93 & '94 models
	8Jx17	52	RA	255/40 ZR17	Pirelli P-Zero Rosso	N3	++	+	
					Bridgestone Potenza S-02A	N4	++	++	
					Continental ContiSportContact2	N2	+++	+++	
					Michelin Pilot Sport PS2	N3	+++	++	
	7Jx17	55	FA	205/50 ZR17	Pirelli P-Zero Rosso	N3	++	++	964 Carrera 2, '90 - '94 models
					Bridgestone Potenza S-02A	N4	+	+	964 Carrera 4, '89 - '94 models
					Bridgestone Potenza S-02	N3	++	++	964 Carrera RS, '92 model
					Continental ContiSportContact2	N2	++	+++	964 Speedster, '93 & '94 models
					Michelin Pilot Sport PS2	N3	+++	+++	
	9Jx17	55	RA	255/40 ZR17	Pirelli P-Zero Rosso	N3	++	++	
					Bridgestone Potenza S-02A	N4	+	+	
					Bridgestone Potenza S-02	N3	++	++	
					Continental ContiSportContact2	N2	++	+++	
					Michelin Pilot Sport PS2	N3	+++	+++	

911 Turbo (964)

Wheel size	Size	RO	Axles	Tyre size	Tread designation	Spec.	Characteristics		Vehicles
							Dry handling	Wet handling	
17-inch	7Jx17	55	FA	205/50 ZR17	Pirelli P-Zero Rosso	N3	++	++	964 Turbo, '91 & '92 models
					Bridgestone Potenza S-02A	N4	+	+	964 Turbo S, '92 model
					Bridgestone Potenza S-02	N3	++	++	964 C2 "Turbo Look", '92 - '93
					Continental ContiSportContact2	N2	++	+++	964 C4 "Turbo Look", '93 & '94
					Michelin Pilot Sport PS2	N3	+++	+++	
	9Jx17	55	RA	255/40 ZR17	Pirelli P-Zero Rosso	N3	++	++	
					Bridgestone Potenza S-02A	N4	+	+	
					Bridgestone Potenza S-02	N3	++	++	
					Continental ContiSportContact2	N2	++	+++	
					Michelin Pilot Sport PS2	N3	+++	+++	
	8Jx17	52	FA	225/45 ZR17	Bridgestone S01	N0	+	+	964 Turbo, '91 & '92 models
	9.5Jx17 *)	68	RA	275/35 ZR17	Bridgestone S01	N0	+	+	964 Turbo S, '92 model
									964 C2 "Turbo Look", '92 - '93
									964 C4 "Turbo Look", '93 & '94
18-inch	8Jx18	52	FA	225/40 ZR18	Pirelli P-Zero Zero	N4	++	+++	964 Turbo 3.6, '93 & '94 models
					Bridgestone Potenza S-02A	N3	++	++	
					Continental ContiSportContact2	N2	++	++	
					Michelin Pilot Sport PS2	N3	++	++	
	10Jx18	65/61	RA	265/35 ZR18	Pirelli P-Zero Zero	N4	++	+++	
					Bridgestone Potenza S-02A	N3	++	++	
					Continental ContiSportContact2	N2	++	++	
					Michelin Pilot Sport PS2	N3	++	++	

0 = satisfactory; + = good; ++ = very good; +++ = excellent
 *) 17-mm spacers on rear axle.

Only tyres of the same make and type, with the same speed index and the same specification code (N0, N1, N2 ...) may be used on a vehicle.

Further detailed information about permitted wheel and tyre sizes as well as spacers that may be required can be found in the relevant parts certificates/manufacturer's certificates held by the Porsche partners.

Recommended makes and types of summer tyres

911 (1993)

	Size	RO	Axles	Tyre size	Tread designation	Spec.	Characteristics		Vehicles
							Dry handling	Wet handling	
Wheel size	7Jx16	55	FA	205/55 ZR16	Michelin SX MXX3	N2	++	++	993 Carrera, '94 - '98 models
16-inch	9Jx16	70	RA	245/45 ZR16	Continental ContiSportContact	N1	++	++	
					Michelin SX MXX3	N2	++	++	
					Continental ContiSportContact	N1	++	++	
Wheel size	7Jx17	55	FA	205/50 ZR17	Pirelli P-Zero Rosso	N3	++	+	993 Carrera, '94 - '98 models
17-inch					Bridgestone Potenza S-02A	N4	++	++	993 Carrera RS, '95 & '96
					Continental ContiSportContact2	N2	++	+++	993 Carrera S, '97 & '98 models
					Michelin Pilot Sport PS2	N3	++	+	
	9Jx17	55	RA	255/40 ZR17	Pirelli P-Zero Rosso	N3	++	+	
					Bridgestone Potenza S-02A	N4	++	++	
					Continental ContiSportContact2	N2	++	+++	
					Michelin Pilot Sport PS2	N3	++	+	
Wheel size	8Jx18	50/	FA	225/40 ZR18	Pirelli P-Zero Rosso	N4	++	++	993, '94 - '98 models
18-inch		52			Bridgestone Potenza S-02A	N3	+	+	993 Carrera RS, '95 & '96
					Continental ContiSportContact2	N2	+	++	not: Targa, Cabriolet before '96
					Pirelli P-Zero Rosso	N4	++	++	
	10Jx18	65	RA	265/35 ZR18	Bridgestone Potenza S-02A	N3	+	+	
					Continental ContiSportContact2	N2	+	++	

911 Turbo (1993)

	Size	RO	Axles	Tyre size	Tread designation	Spec.	Characteristics		Vehicles
							Dry handling	Wet handling	
Wheel size	8Jx18	52	FA	225/40 ZR18	Pirelli P-Zero Rosso	N4	+++	+++	993 Turbo
18-inch					Bridgestone Potenza S-02A	N3	+	++	993 Carrera S
					Continental ContiSportContact2	N2	+++	+++	993 Carrera 4S
					Michelin Pilot Sport PS2	N3	+++	+	993 Turbo Look
	10Jx18	40/ 65*)	RA	285/30 ZR18	Pirelli P-Zero Rosso	N4	+++	+++	
					Bridgestone Potenza S-02A	N3	+	++	
					Continental ContiSportContact2	N2	+++	+++	
					Michelin Pilot Sport PS2	N3	+++	+	

959

	Size	RO	Axles	Tyre size	Tread designation	Spec.	Characteristics		Vehicles
							Dry handling	Wet handling	
Wheel size	8Jx17 DL	44	FA	235/45 ZR17	Bridgestone RE 71	N0	+	+	959
17-inch	10Jx17 DL	28.3	RA	255/40 ZR17	Bridgestone RE 71	N0	+	+	

0 = satisfactory; + = good; ++ = very good; +++ = excellent
 *) with 25-mm spacer on each wheel on rear axle.

Only tyres of the same make and type, with the same speed index and the same specification code (N0, N1, N2 ...) may be used on a vehicle.

Further detailed information about permitted wheel and tyre sizes as well as spacers that may be required can be found in the relevant parts certificates/manufacturers' certificates held by the Porsche partners.

Recommended makes and types of summer tyres

924

	Size	RO	Axles	Tyre size	Tread designation	Spec.	Characteristics		Vehicle
							Dry handling	Wet handling	
Wheel size 15-inch	6Jx15	36	FA/RA	185/70 R15 89V	Michelin XWX ¹⁾	N1	++	++	924, '76 - '85 models
					Fulda Y - 2000	N0	+	++	924 S, '86 - '88 models
									924 Turbo, '79 - '82 models
									924 Carrera GT, '81 model
	7Jx15	23,3	FA/RA	195/65 R15 91V	Pirelli P 6000 ²⁾	N1	++	+	924, '76 - '85 models
					Goodyear Excellence	N0	+	++	924 S, '86 - '88 models
					Fulda Carat Progresso	N0	+	+++	924 Turbo, '79 - '82 models
					Dunlop SP Sport FastResponse	N0	++	++	924 Carrera GT, '81 model
	7Jx15	23,3	FA/RA	215/60 R15 94W	Pirelli P 6000 ²⁾	N1	++	+	924 Turbo, '79 - '82 models
									924 Carrera GT, '81 model
Wheel size 16-inch	6Jx16	52,3/ 53	FA/RA	205/55 ZR16	Pirelli P-Zero Direzionale	N3	++	++	924 Turbo, '79 - '82 models
					Bridgestone Potenza S-02	N3	0	++	924 S, '86 - '88 models
					Continental ContiSportContact	N1	+	+++	
					Michelin SX MXX3	N2	++	++	
					Michelin Pilot Exalto PE2	N0	+	+++	
	6Jx16	52,3/ 53	FA	205/55 ZR16	Pirelli P-Zero Direzionale	N3	++	++	924 Turbo, '79 - '82 models
					Bridgestone Potenza S-02	N3	0	++	924 S, '86 - '88 models
					Continental ContiSportContact	N1	+	+++	
					Michelin SX MXX3	N2	++	++	
					Michelin Pilot Exalto PE2	N0	+	+++	
	7Jx16	52,3/ 55	RA	205/55 ZR16	Pirelli P-Zero Direzionale	N3	++	++	
					Bridgestone Potenza S-02	N3	0	++	
					Continental ContiSportContact	N1	+	+++	
					Michelin SX MXX3	N2	++	++	
					Michelin Pilot Exalto PE2	N0	+	+++	

0 = satisfactory; + = good; ++ = very good; +++ = excellent
¹⁾ Only one version of this tyre is produced. It therefore has no (!) specification code. However, it still meets all Porsche requirements and is therefore approved accordingly.

²⁾ Load index/speed index 91W

Only tyres of the same make and type, with the same speed index and the same specification code (N0, N1, N2 ...) may be used on a vehicle.

Speed Index: V= 240 km/h (150 mph)
W= 270 km/h (169 mph)

Further detailed information about permitted wheel and tyre sizes as well as spacers that may be required can be found in the relevant parts certificates/manufacturers' certificates held by the Porsche partners.

Recommended makes and types of summer tyres

944

	Size	RO	Axles	Tyre size	Tread designation	Spec.	Characteristics		Vehicles
							Dry handling	Wet handling	
Wheel size 16-inch	7Jx16	23,3	FA/RA	205/55 ZR16	Pirelli P-Zero Direzionale	N3	++	++	944, '82 - '86 models
					Michelin Pilot Exalto PE2	N0	0	++	
					Bridgestone Potenza S-02	N3	+	+++	
					Continental ContiSportContact	N1	++	++	
					Michelin SX MXX3	N2	+	+++	
	7Jx16	23,3	FA	205/55 ZR16	Pirelli P-Zero Direzionale	N3	++	++	944, '82 - '86 models
					Bridgestone Expedia S-02	N3	++	+	
					Continental ContiSportContact	N1	+	+++	
					Michelin SX MXX3	N2	+	+	
					Michelin Pilot Exalto PE2	N0	+	+++	
	8Jx16	23,3	RA	225/50 ZR16	Pirelli P-Zero Assimetico	N3	++	++	
					Bridgestone Expedia S-02	N3	++	+	
					Continental ContiSportContact	N1	+	+++	
					Michelin SX MXX3	N2	+	+	
					Michelin Pilot Exalto PE2	N0	+	+++	
	7Jx16	52,3/ 55	FA	205/55 ZR16	Pirelli P-Zero Direzionale	N3	++	++	944, '87 - '89 models
					Bridgestone Expedia S-02	N3	++	+	
					Continental ContiSportContact	N1	+	+++	
					Michelin SX MXX3	N2	+	+	
					Michelin Pilot Exalto PE2	N0	+	+++	
	8Jx16	52,3/ 52	RA	225/50 ZR16	Pirelli P-Zero Assimetico	N3	++	++	
					Bridgestone Expedia S-02	N3	++	+	
					Continental ContiSportContact	N1	+	+++	
					Michelin SX MXX3	N2	+	+	
					Michelin Pilot Exalto PE2	N0	+	+++	
	7Jx16	65	FA	225/50 ZR16	Michelin SX MXX3	N2	+++	++	944 Turbo S
					Bridgestone Expedia S-01	N2	++	++	
					Bridgestone Potenza S-02	N3	+	+++	
					Continental ContiSportContact	N1	+++	+++	
					Michelin SX MXX3	N2	+++	++	
	9Jx16	60	RA	245/45 ZR16	Bridgestone Expedia S-01	N2	++	++	
					Bridgestone Potenza S-02	N3	+	+++	
					Continental ContiSportContact	N1	+++	+++	
					Michelin SX MXX3	N2	+++	++	
					Michelin Pilot Sport PS2	N3	++	++	
Wheel size 17-inch	7.5 Jx17	65	FA	225/45 ZR17	Bridgestone Potenza S-02	N3	+++	+	944, '87 - '89 models
					Michelin Pilot Sport PS2	N3	++	++	
					Bridgestone Potenza S-02	N3	+++	+	
					Michelin Pilot Sport PS2	N3	++	++	

968

2/2008

968

	Size	RO	Axles	Tyre size	Tread designation	Spec.	Characteristics		Vehicles
							Dry handling	Wet handling	
Wheel size 17-inch	7.5Jx17	65	FA	225/45 ZR17	Bridgestone Potenza S-02	N3	+++	+	968, '92 - '95 models
					Michelin Pilot Sport PS2	N3	++	++	
	9Jx17	55	RA	255/40 ZR17	Bridgestone Potenza S-02	N3	+++	+	968 CS, '93 - '95 models
					Michelin Pilot Sport PS2	N3	++	++	

968 Turbo S

	Size	RO	Axles	Tyre size	Tread designation	Spec.	Characteristics		Vehicles
							Dry handling	Wet handling	
Wheel size 18-inch	8Jx18	53	FA	235/40 ZR18	Pirelli P-Zero Rosso	N4	++	+++	968 Turbo S, '93 model
					Pirelli P-Zero Rosso	N4	++	+++	

0 = satisfactory; + = good; ++ = very good; +++ = excellent

Only tyres of the same make and type, with the same speed index and the same specification code (N0, N1, N2 ...) may be used on a vehicle.

Further detailed information about permitted wheel and tyre sizes as well as spacers that may be required can be found in the relevant parts certificates/manufacturers' certificates held by the Porsche partners.

Recommended makes and types of summer tyres

928

	Size	RO	Axles	Tyre size	Tread designation	Spec.	Characteristics		Vehicles
							Dry handling	Wet handling	
Wheel size 16-inch	7Jx16	65	FA/RA	225/50 ZR16	Pirelli P-Zero Asimmetrico	N3	++	++	928, '78 - '82 models
					Bridgestone Expedia S-01	N2	0	+	928 S, '80 - '86 models
					Bridgestone Potenza S-02	N3	++	+++	
					Continental ContiSportContact	N1	++	+++	
					Michelin SX MXX3	N2	+	+	
					Michelin Pilot Exalto PE2	N0	0	+++	
	7Jx16	65	FA	225/50 ZR16	Michelin SX MXX3	N2	+++	++	928 GT, up to '92
					Bridgestone Expedia S-01	N2	++	++	928 S4, CS, GT '89
					Bridgestone Potenza S-02	N3	+	+++	
	8Jx16	52,3	RA	245/45 ZR16	Continental ContiSportContact	N1	+++	+++	
					Michelin SX MXX3	N2	+++	++	
					Bridgestone Expedia S-01	N2	++	++	
Wheel size 17-inch	7.5 Jx17	65	FA	225/45 ZR17	Bridgestone Potenza S-02	N3	+++	+	928 S4, CS, GT '89, GTS
					Michelin Pilot Sport PS2	N3	++	++	
					Bridgestone Potenza S-02	N3	+++	+	
					Continental ContiSportContact	N1	+++	+++	
	9Jx17	55	RA	255/40 ZR17	Bridgestone Potenza S-02	N3	+++	+	
					Michelin Pilot Sport PS2	N3	++	++	

914

914

	Size	RO	Axles	Tyre size	Tread designation	Spec.	Characteristics		Vehicles
							Dry handling	Wet handling	
Wheel size 15-inch	6Jx15	36	FA/RA	185/70 R15 89V	Michelin XWX ¹⁾	¹⁾	++	++	914, 914/6
					Fulda Y - 2000	N0	+	++	
	6Jx15	36	FA/RA	195/65 R15 91V	Pirelli P 6000 ²⁾	N1	++	+	914
					Goodyear Excellence	N0	+	++	914/6, '70 - '72 models
					Fulda Carat Progresso	N0	+	++	
					Dunlop SP Sport FastResponse	N0	++	++	
	6Jx15	36	FA	195/65 R15 94W	Pirelli P 6000 ²⁾	N1	++	+	914/6, '70 - '72 models
					Pirelli P 6000 ²⁾	N1	++	+	

0 = satisfactory; + = good; ++ = very good; +++ = excellent


¹⁾ Only one version of this tyre is produced. It therefore has no (!) specification code. However, it still meets all Porsche requirements and is therefore approved accordingly. This is the only tyre that may also be mounted with a tube. Mounting tyres with tubes is not permitted for all other tyres.

²⁾ Load index/speed index 91W

Only tyres of the same make and type, with the same speed index and the same specification code (N0, N1, N2 ...) may be used on a vehicle.

Speed Index: V= 240 km/h (150 mph)
W= 270 km/h (169 mph)

Further detailed information about permitted wheel and tyre sizes as well as spacers that may be required can be found in the relevant parts certificates/manufacturer's certificates held by the Porsche partners.

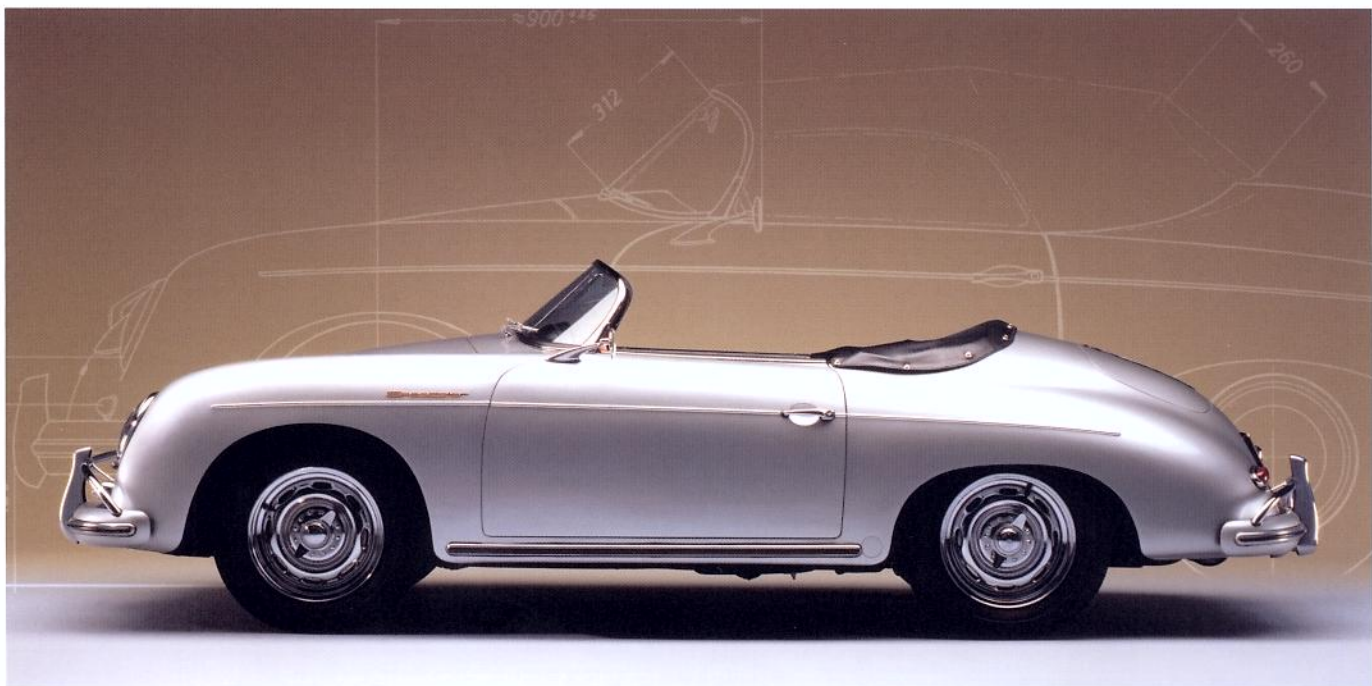

Porsche and the Porsche Crest
are registered trademarks of
Dr. Ing. h.c. F. Porsche AG.

Dr. Ing. h.c. F. Porsche AG
Kundenzentrum-Classical
Werk 1/Tor 1
Porscheplatz 1
70435 Stuttgart, Germany
Classic restoration service:
Tel.: +49 (0)711 911-27150
Fax: +49 (0)711 911-27811
E-Mail: classic-service@porsche.de

Internet: www.porsche.com/classic

© Dr. Ing. h.c. F. Porsche AG, 2008

Edition: 06/08

Printed in Germany